



EXTERIOR METAL BUILDING PRODUCTS

PREMIUM METAL EXTERIORS
MADE IN CANADA

ONTARIO METAL ROOFING SALES

1266 KILWORTHY ROAD, GRAVENHURST, ON P0E 1G0

CALL: 1 (705) 323-3322 email: sales@ontariometalroofingsales.ca

ontariometalroofingsales.ca



SNAP LOCK STANDING SEAM

Premium Standing Seam Made in Canada.

FEATURES AND BENEFITS

PHOTO: Natural Galvalume® Snap Lock

OUTSTANDING DURABILITY With 50 year limited warranty.

LOW MAINTENANCE Simple to maintain and clean.

EASY INSTALLATION Quick and easy installations.

PREMIUM DESIGN Concealed fasteners that allow for thermal expansion.

EXTREME WEATHER RESISTANCE Hail, sleet and windstorm resistant.

MULTI USE Can be used as siding or cladding and roofing (3/12 minimum pitch).

MADE IN CANADA.



POLAR WHITE SMP

DARK GREY TEX/SMP

TECHNICAL SNAP LOCK STANDING SEAM



MULTI USE: for roofing and siding applications.

DIMENSIONS: 15.5"W x 1'-60"L

SUBSTRATE: 24 & 26 GAUGE (TEX & SMP) Galvalume® Steel with 50 year limited warranty.

ROOF PITCH: 3/12 Minimum Pitch for roofing applications.

FINISH OPTIONS: 40 Year Textured (TEX) and SMP or Natural (Unpainted) Galvalume®.

PHOTO LEFT: TEX Black

GRAPHITE TEX/SMP

DARK BROWN TEX/SMP

BLACK TEX/SMP

GALVALUME®

PVDF Specs	ASTM	Description
Dry Film Thickness	D 1400-94	0.75-1.85 Mil
Humidity Resistance	D 2247	100% relativity @ 95° passes 2000 hours.
Salt Spray	B 117	5% salt spray @ 95° passes 1000 hours
Chalk Resistance	D 4214	Hunter Units Florida exposure @ 45°S rating not at <8 @ 40 years.
Colour Retention	D 4214	Hunter Units Florida exposure @ 45°S rating not at >5△ @ 40 years.
Warranty		40-year limited warranty



MECHANICAL LOCK STANDING SEAM

Premium Standing Seam Made in Canada.

FEATURES AND BENEFITS

PHOTO: TEX Black Mechanical Lock

OUTSTANDING DURABILITY With 50 year limited warranty.

LOW MAINTENANCE Simple to maintain and clean.

EASY INSTALLATION Quick and easy installations.

PREMIUM DESIGN Concealed fasteners that allow for thermal expansion.

EXTREME WEATHER RESISTANCE Hail, sleet and windstorm resistant.

MULTI USE Can be used as siding or cladding and roofing (1/12 minimum pitch).

MADE IN CANADA.

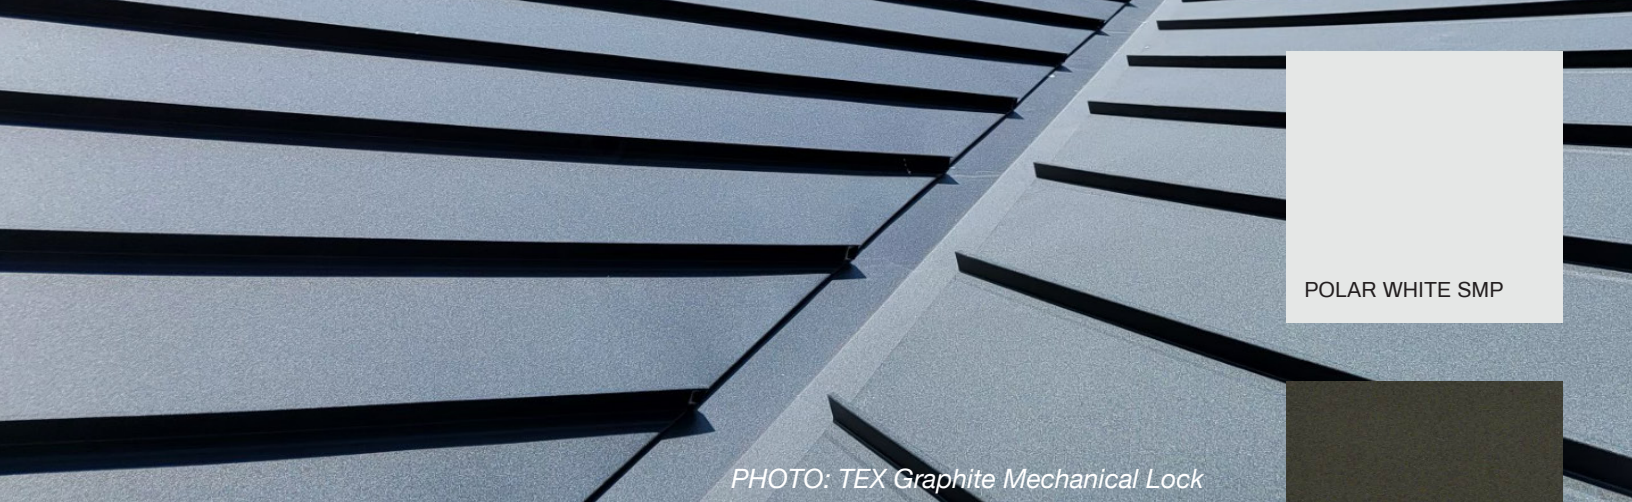


PHOTO: TEX Graphite Mechanical Lock


TECHNICAL MECHANICAL LOCK STANDING SEAM



POLAR WHITE SMP




DARK GREY TEX/SMP

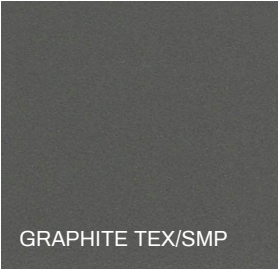


GRAPHITE TEX/SMP



DARK BROWN TEX/SMP

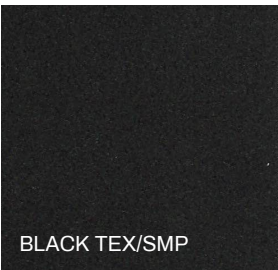

BLACK TEX/SMP

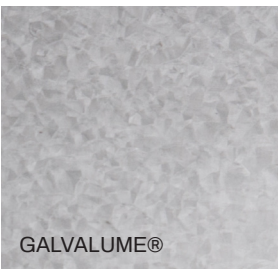

GALVALUME®



MULTI USE: for roofing and siding applications.

DIMENSIONS: 16"W x 1'-60'L

SUBSTRATE: 24 & 26 GAUGE (TEX & SMP) Galvalume® Steel with 50 year limited warranty.

ROOF PITCH: 1/12 Minimum Pitch for roofing applications.

FINISH OPTIONS: 40 Year Textured (TEX) and SMP or Natural (Unpainted) Galvalume®.

PHOTO LEFT: TEX Black

PVDF Specs	ASTM	Description
Dry Film Thickness	D 1400-94	0.75-1.85 Mil
Humidity Resistance	D 2247	100% relativity @ 95° passes 2000 hours.
Salt Spray	B 117	5% salt spray @ 95° passes 1000 hours
Chalk Resistance	D 4214	Hunter Units Florida exposure @ 45°S rating not at <8 @ 40 years.
Colour Retention	D 4214	Hunter Units Florida exposure @ 45°S rating not at >5Δ @ 40 years.
Warranty		40-year limited warranty

METAL SLATE SHINGLE

Premium Metal Roofing Made in Canada.



FEATURES AND BENEFITS

PHOTOS ABOVE: TEX Dark Grey

OUTSTANDING DURABILITY With 50 year limited warranty.

LOW MAINTENANCE Simple to maintain and clean.

EASY INSTALLATION Quick and easy installations.

PREMIUM DESIGN Concealed fastener, direct-to-deck roofing system.

EXTREME WEATHER RESISTANCE Hail, sleet and windstorm resistant.

PREMIUM SLATE LOOK At a fraction of the weight and cost of real slate.

MADE IN CANADA.




DARK GREY TEX/SMP

PHOTO: TEX Black

TECHNICAL METAL SLATE SHINGLE ROOFING

GRAPHITE TEX/SMP

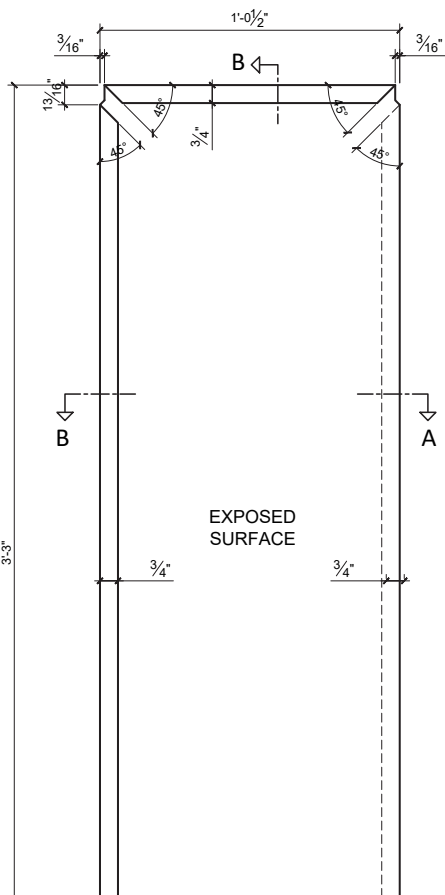


DIMENSIONS: 39"W x 12.5"H

SUBSTRATE: 28 GAUGE (TEX & SMP)
Galvalume® Steel with 50 year limited warranty.


FINISH OPTIONS: 40 Year Textured (TEX) and SMP.

ROOF PITCH: 3/12 Minimum Pitch for roofing applications.

DARK BROWN TEX/SMP



DETAIL-A



DETAIL-B


BLACK TEX/SMP



PHOTO: TEX Graphite

STRAIGHT RIBBED SHEET METAL

Premium Sheet Metal Made in Canada.

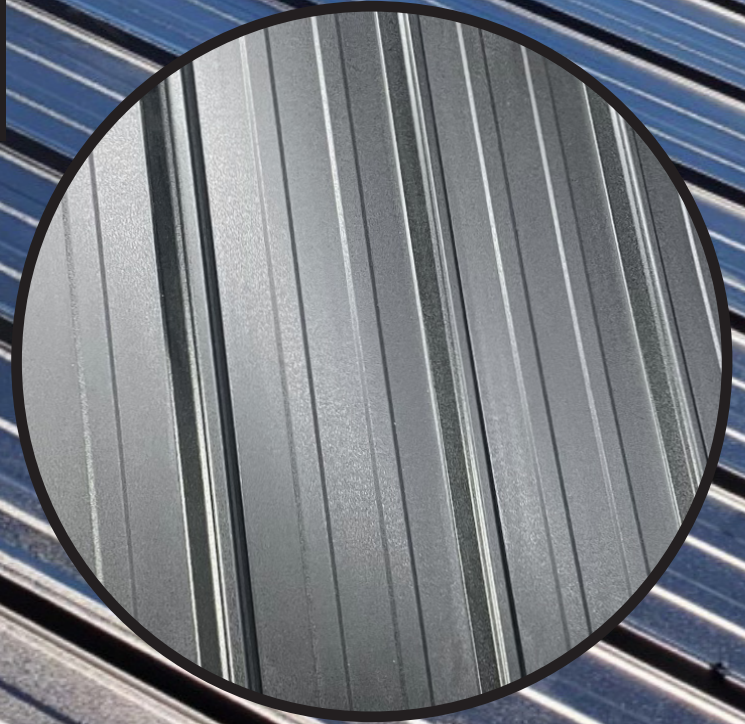

FEATURES AND BENEFITS

PHOTOS ABOVE: TEX Black Straight Ribbed

OUTSTANDING DURABILITY With 40 year limited warranty.

LOW MAINTENANCE Simple to maintain and clean.

EASY INSTALLATION Quick and easy installations.

PREMIUM DESIGN Ridges engineered for outstanding strength.


EXTREME WEATHER RESISTANCE Hail, sleet and windstorm resistant.

MULTI USE Can be used as siding or cladding and roofing (3/12 minimum pitch).


MADE IN CANADA.



PHOTO: Polar White

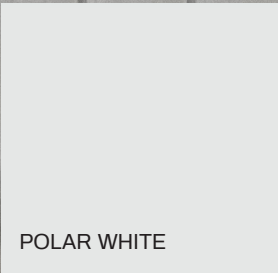


POLAR WHITE

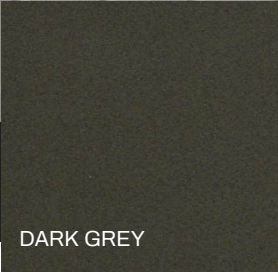

DARK GREY

TECHNICAL STRAIGHT RIBBED SHEET METAL


MULTI USE: for heavy duty siding and roofing applications.

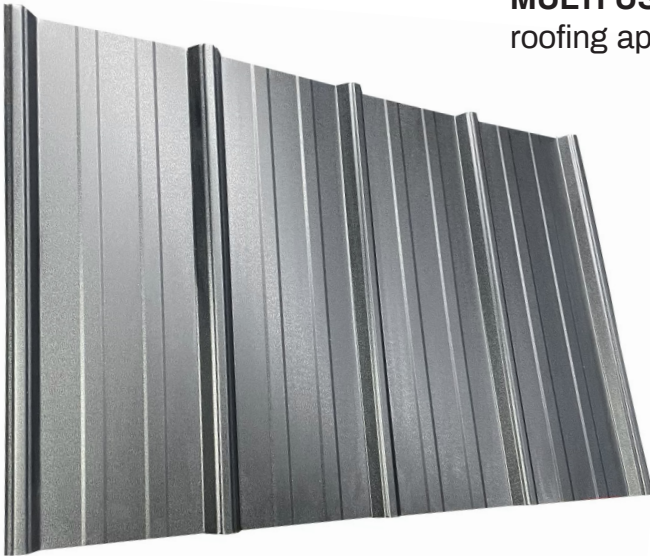


DIMENSIONS: 36"W x 4'-36'L

SUBSTRATE: 26 & 29 GAUGE (TEX & SMP) Galvalume® Steel with 40 year limited warranty.

ROOF PITCH: 3/12 Minimum Pitch for roofing applications.

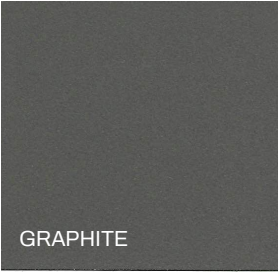


GRAPHITE

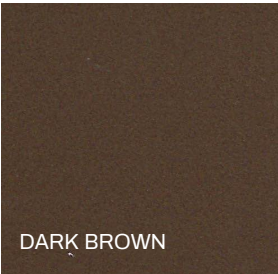


DARK BROWN

FINISH OPTIONS: 40 Year Textured (TEX) and SMP or Natural (Unpainted) Galvalume®.

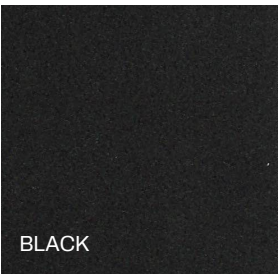

BLACK

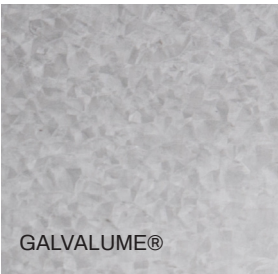

GALVALUME®

Perspectra Plus Series™	ASTM	Description
Film Thickness	ASTM D5796	The exposed surface shall have a dry film thickness of 25µm ± 3µm (1.0 ± 0.1 mils). The unexposed or reverse side shall have a dry film thickness which will vary in accordance with the customer's requirements.
Film Cure	ASTM D5402	The baked film shall withstand one hundred and fifty (150) MEK double rubs.
Film Integrity	40 Years	During the first forty (40) years of exposure, the paint film shall have no evidence of cracking, flaking, or checking to an extent that is apparent on ordinary outdoor visual observations.
Chalking	ASTM D4214	For the first thirty (30) years, vertical installations will not chalk more than a #8 rating and non-vertical installations will not chalk more than #6 when measured per ASTM D4214, Meth-
Colour Change / Fade	ASTM D2244	For the first thirty (30) years, vertical installations will not change colour more than five (5) and non-vertical installations will not change more than seven (7) delta E colour units. Colour measurements are to be made per ASTM D2244 and only on clean surfaces after removing surface deposits and chalk per ASTM D3964.
Humidity Resistance	ASTM D2247	The humidity resistance test shall be conducted at 100% relative humidity at a temperature of 38°C (100°F). After 1000 hours of exposure, the surface shall show no field blisters.

MODERN PLANK METAL SIDING

Premium Metal Siding Made in Canada.



FEATURES AND BENEFITS

OUTSTANDING DURABILITY With 50 year limited warranty.

LOW MAINTENANCE Simple to maintain and clean.

EASY INSTALLATION Built in nail strips for quick & easy installs.

PREMIUM DESIGN Concealed fasteners for maximum performance.

TRADITIONAL WOOD LOOK Without the pain of rot, mold and warping.


DISTINCT PROFILE DESIGN Eye catching lines and shadows for lasting appeal.

MADE IN CANADA.

*ABOVE: Tex Black/Woodgrain Gunstock
CIRCLE: Woodgrain Saddle*



PHOTO: *Tex Black*

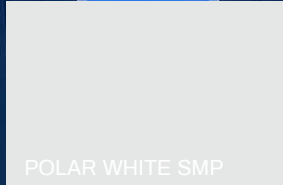


POLAR WHITE SMP




DARK GREY



GRAPHITE

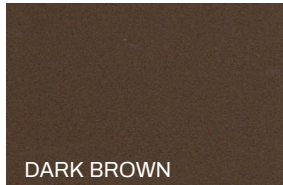


DARK BROWN

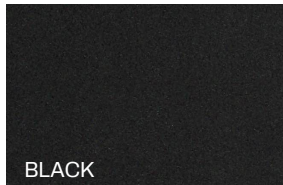


BLACK



*WGS BARNBOARD

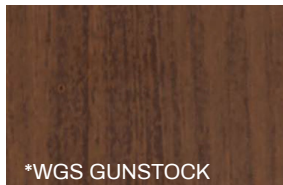

*WGS GUNSTOCK

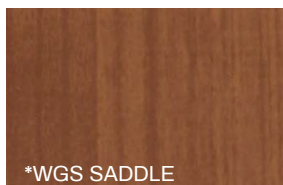

*WGS SADDLE

TECHNICAL MODERN PLANK METAL SIDING



PANEL DIMENSIONS:

7" panel coverage x 10' (standard length)
 7" panel coverage up to 30' (extra shipping)

SUBSTRATE: 26 & 24 GAUGE Galvalume® Steel with 50 year limited warranty.

FINISH OPTIONS: All colours available in PVDF, SMP Gloss and Textured (TEX) with 40 year limited warranty.

Product also available in Woodgrain Series *WGS

An enhanced state of the art silicone modified polyester (SMP) paint system makes Perspectra Plus Series™ ideal for commercial and residential metal roofing, agricultural and industrial metal building components, pre-engineered metal building systems as well as rainware products.

PVDF Specs	ASTM	Description
Dry Film Thickness	D 1400-94	0.75-1.85 Mil
Humidity Resistance	D 2247	100% relativity @ 95° passes 2000 hours.
Salt Spray	B 117	5% salt spray @ 95° passes 1000 hours
Chalk Resistance	D 4214	Hunter Units Florida exposure @ 45°S rating not at <8 @ 40 years.
Colour Retention	D 4214	Hunter Units Florida exposure @ 45°S rating not at >5Δ @ 40 years.
Warranty		40-year limited warranty

NOTE: Colours will look different in real life. See chips to order.

BOARD AND BATTEN METAL SIDING

Premium metal siding Made in Canada.



FEATURES AND BENEFITS

OUTSTANDING DURABILITY With 50 year limited warranty.

LOW MAINTENANCE Simple to maintain and clean.


EASY INSTALLATION Built in nail strips for quick & easy installs.

PREMIUM DESIGN Concealed fasteners for maximum performance.


TRADITIONAL WOOD LOOK Without the pain of rot, mold and warping.

DISTINCT PROFILE DESIGN Eye catching lines and shadows for lasting appeal.

MADE IN CANADA.

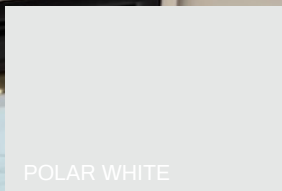


POLAR WHITE

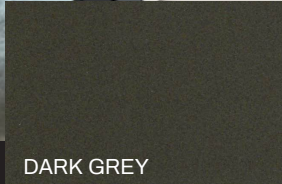


DARK GREY



GRAPHITE

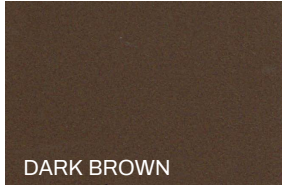


DARK BROWN

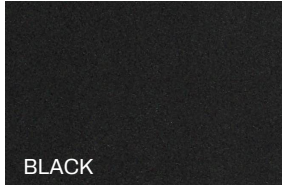


BLACK



*WGS BARNBOARD

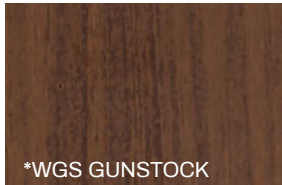


*WGS GUNSTOCK

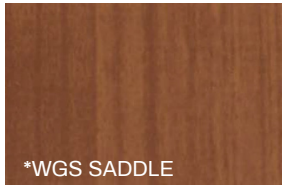

*WGS SADDLE

TECHNICAL BOARD AND BATTEN METAL SIDING

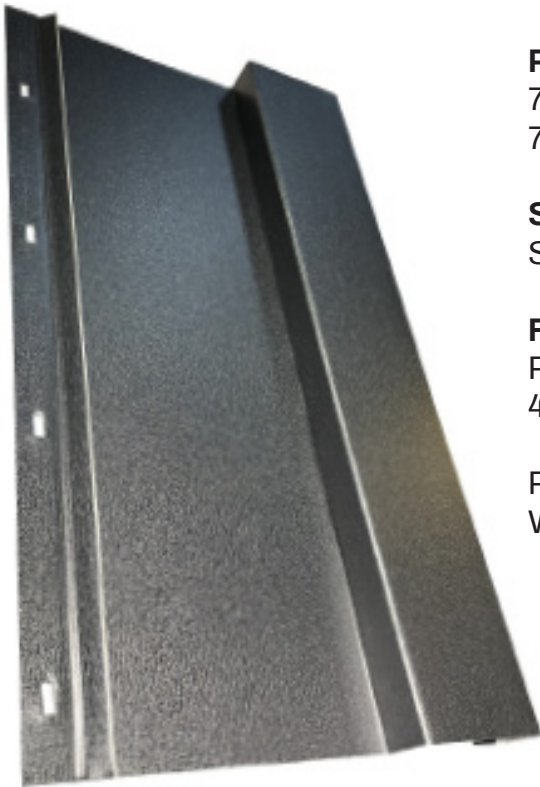

PANEL DIMENSIONS:

7" panel coverage x 10' (standard length)
 7" panel coverage up to 30' (extra shipping)

SUBSTRATE: 26 & 24 GAUGE Galvalume® Steel with 50 year limited warranty.

FINISH OPTIONS: All colours available in PVDF, SMP Gloss and Textured (TEX) with 40 year limited warranty.

Product also available in Woodgrain Series *WGS

Photo Left: TEX Black

PVDF Specs	ASTM	Description
Dry Film Thickness	D 1400-94	0.75-1.85 Mil
Humidity Resistance	D 2247	100% relativity @ 95° passes 2000 hours.
Salt Spray	B 117	5% salt spray @ 95° passes 1000 hours
Chalk Resistance	D 4214	Hunter Units Florida exposure @ 45°S rating not at <8 @ 40 years.
Colour Retention	D 4214	Hunter Units Florida exposure @ 45°S rating not at >5△ @ 40 years.
Warranty		40-year limited warranty

NOTE: Colours will look different in real life. See chips to order.

7/8 CORRUGATED SHEET METAL

Premium Sheet Metal Made in Canada.



FEATURES AND BENEFITS

PHOTOS ABOVE: TEX Black Corrugated Round

OUTSTANDING DURABILITY With 40 year limited warranty.

LOW MAINTENANCE Simple to maintain and clean.

EASY INSTALLATION Quick and easy installations.

PREMIUM DESIGN Ridges engineered for outstanding strength.

EXTREME WEATHER RESISTANCE Hail, sleet and windstorm resistant.

MULTI USE Can be used as siding or cladding and roofing (3/12 minimum pitch).


MADE IN CANADA.



PHOTO: TEX Black




POLAR WHITE

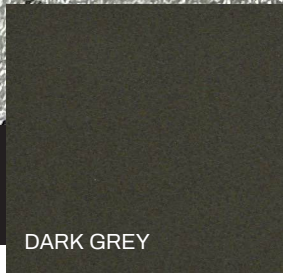

DARK GREY

TECHNICAL 7/8 CORRUGATED SHEET METAL

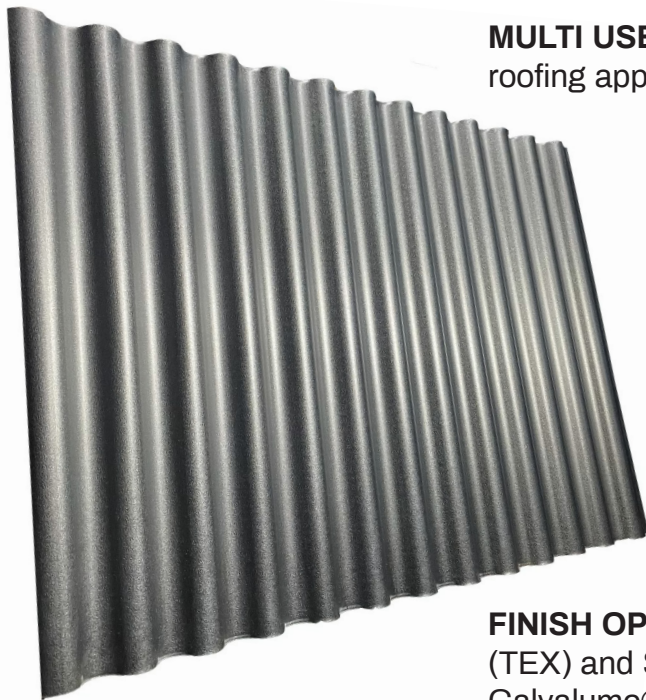


MULTI USE: for heavy duty siding and roofing applications.

DIMENSIONS: 33"W x 4'-35'L


SUBSTRATE: 26 & 29 GAUGE (TEX & SMP) Galvalume® Steel with 40 year limited warranty. warranty.

ROOF PITCH: 3/12 Minimum Pitch for roofing applications.

FINISH OPTIONS: 40 Year Textured (TEX) and SMP or Natural (Unpainted) Galvalume®.

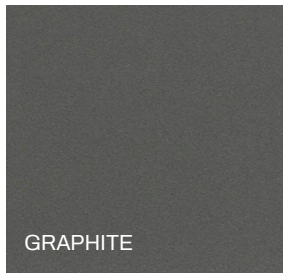

GRAPHITE

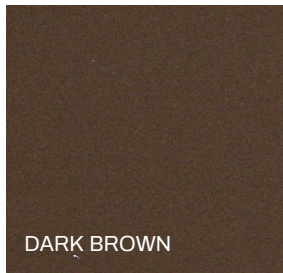

DARK BROWN



BLACK



GALVALUME®

Perspectra Plus Series™	ASTM	Description
Film Thickness	ASTM D5796	The exposed surface shall have a dry film thickness of 25µm ± 3µm (1.0 ± 0.1 mils). The unexposed or reverse side shall have a dry film thickness which will vary in accordance with the customer's requirements.
Film Cure	ASTM D5402	The baked film shall withstand one hundred and fifty (150) MEK double rubs.
Film Integrity	40 Years	During the first forty (40) years of exposure, the paint film shall have no evidence of cracking, flaking, or checking to an extent that is apparent on ordinary outdoor visual observations.
Chalking	ASTM D4214	For the first thirty (30) years, vertical installations will not chalk more than a #8 rating and non-vertical installations will not chalk more than #6 when measured per ASTM D4214, Meth-
Colour Change / Fade	ASTM D2244	For the first thirty (30) years, vertical installations will not change colour more than five (5) and non-vertical installations will not change more than seven (7) delta E colour units. Colour measurements are to be made per ASTM D2244 and only on clean surfaces after removing surface deposits and chalk per ASTM D3964.
Humidity Resistance	ASTM D2247	The humidity resistance test shall be conducted at 100% relative humidity at a temperature of 38°C (100°F). After 1000 hours of exposure, the surface shall show no field blisters.

HIDDEN VENT METAL SOFFIT

Premium Metal Soffit Made in Canada.



FEATURES AND BENEFITS

ABOVE: Tex Black CIRCLE: Graphite

OUTSTANDING DURABILITY With 50 year limited warranty.

LOW MAINTENANCE Simple to maintain and clean.

EASY INSTALLATION Built in nail strips for quick & easy installs.

PREMIUM DESIGN Concealed fasteners for maximum performance.


TRADITIONAL WOOD LOOK Without the pain of rot, mold and warping.

DISTINCT PROFILE DESIGN Eye catching lines and shadows for lasting appeal.

MADE IN CANADA.



PHOTO: Black

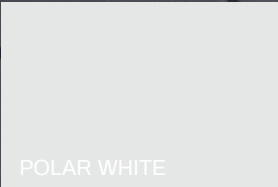


POLAR WHITE




DARK GREY



GRAPHITE

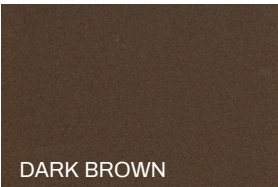


DARK BROWN

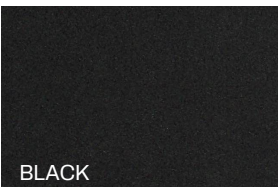


BLACK



*WGS BARNBOARD

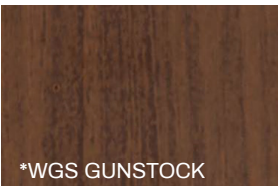

*WGS GUNSTOCK

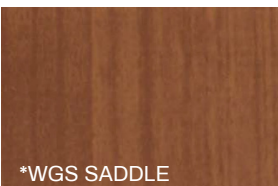

*WGS SADDLE

NOTE: Colours will look different in real life. See chips to order.

TECHNICAL HIDDEN VENT METAL SOFFIT



PANEL DIMENSIONS:

7" panel coverage x 10' (standard length)
 7" panel coverage up to 30' (extra shipping)

SUBSTRATE: 26 & 24 GAUGE Galvalume® Steel with 50 year limited warranty.

FINISH OPTIONS: All colours available in PVDF, SMP Gloss and Textured (TEX) with 40 year limited warranty.

Product also available in Woodgrain Series *WGS

An enhanced state of the art silicone modified polyester (SMP) paint system makes Perspectra Plus Series™ ideal for commercial and residential metal roofing, agricultural and industrial metal building components, pre-engineered metal building systems as well as rainware products.

PVDF Specs	ASTM	Description
Dry Film Thickness	D 1400-94	0.75-1.85 Mil
Humidity Resistance	D 2247	100% relativity @ 95° passes 2000 hours.
Salt Spray	B 117	5% salt spray @ 95° passes 1000 hours
Chalk Resistance	D 4214	Hunter Units Florida exposure @ 45°S rating not at <8 @ 40 years.
Colour Retention	D 4214	Hunter Units Florida exposure @ 45°S rating not at >5△ @ 40 years.
Warranty		40-year limited warranty